

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number  
**WO 2004/002643 A1**

(51) International Patent Classification<sup>7</sup>: **B21C 47/14**

(21) International Application Number:  
PCT/EP2003/006913

(22) International Filing Date: 30 June 2003 (30.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
MI2002A001444 1 July 2002 (01.07.2002) IT

(71) Applicant (for all designated States except US): **DANIELI & C. OFFICINE MECCANICHE S.P.A.** [IT/IT]; Via Nazionale, 41, I-33042 Buttrio (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DE LUCA, Andrea**

[IT/IT]; Via Malignani, 13/6, I-33047 Remanzacco (IT).  
**POLONI, Alfredo** [IT/IT]; Via G. Paolini, 29, I-34070  
Fogliano Redipuglia (IT).


(74) Agent: **GERVASI, Gemma**; Notarbartolo & Gervasi  
S.p.A., Corso di Porta Vittoria, 9, I-20122 Milan (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO).

[Continued on next page]

(54) Title: **LAYING PIPE**

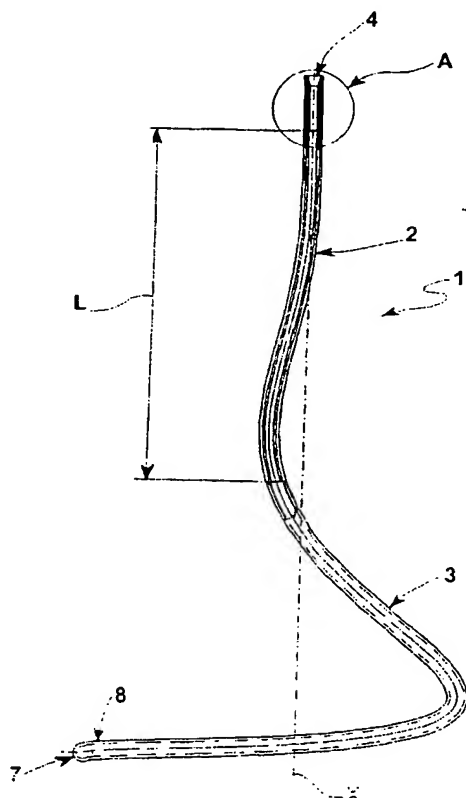

(57) Abstract: A laying pipe (1) for a laying head for winding rounded rods comprises a first external pipe (5) with a first rectilinear section (2) and a second spiral section (3). A second internal pipe (10) in a single piece, with external diameter equal to the internal diameter of the first pipe (5) is inserted inside it in the first section (2). The laying pipe also has a sleeve (6) fixed at the rod entry end (4) which has the entry edges with fillet or a chamfer.

WO 2004/002643 A1

BEST AVAILABLE COPY